

# **Application Note**

## **For**

### **Small Size Wide Temperature EPD**

<b>Description</b>	<b>Interface for wide temperature EPDs. Using embedded OTP LUT supports Fast update.</b>
<b>Date</b>	<b>2023/12/25</b>
<b>Doc. No.</b>	
<b>Revision</b>	<b>01</b>

4F, No. 28, Chuangye Rd., Tainan Science Park, Tainan City 74144, Taiwan (R.O.C.)

Tel: +886-6-279-5399

Fax: +886-6-270-5857


## Table of Contents

1. General Description.....	3
1.1 Overview .....	3
1.2 Definition of operation mode .....	3
1.3 Panel drawing .....	4
1.52-inch EPD .....	4
1.4 EPD Driving Flow Chart .....	5
1.5 Overall Waveform.....	6
1.6 SPI Timing Format .....	7
2. Power on COG driver .....	11
3. Input initial command .....	12
4. Input image to the EPD .....	13
5.1 DTM1, DTM2 Definition.....	14
5.2 Image data sending (DTM1, DTM2) .....	15
5. Send updating command .....	16
6. Turn-off DC/DC .....	17
Revision History.....	19
Glossary of Acronyms.....	20

## 1. General Description

### 1.1 Overview

The document introduces how to drive the 1.52" EPD with OTP LUT. This EPD use single driver and that embedded T-con. The major control interface of the driver is SPI. The host sends both the setting commands and the display image to driver through the SPI bus.

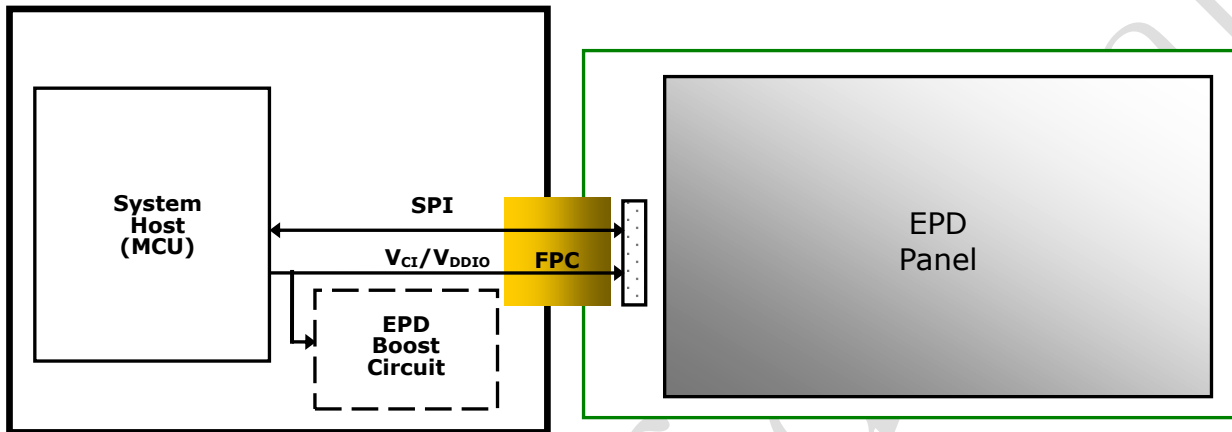

### 1.2 Definition of operation mode


The section will define and clarify several update modes, their names are easy to confuse.

**Normal update:** it will perform the complete waveform for image update. The process will go through the inverse, shaking and imaging phases. The mode will take more time, but it will bring better image performance.

**Fast update:** the short waveform will be executed. COG compares the pixel data of the current image and the new image pixel by pixel, and then only drives the transition pixels. The mode can quickly complete the image update.

1.3 Panel drawing


1.52-inch EPD

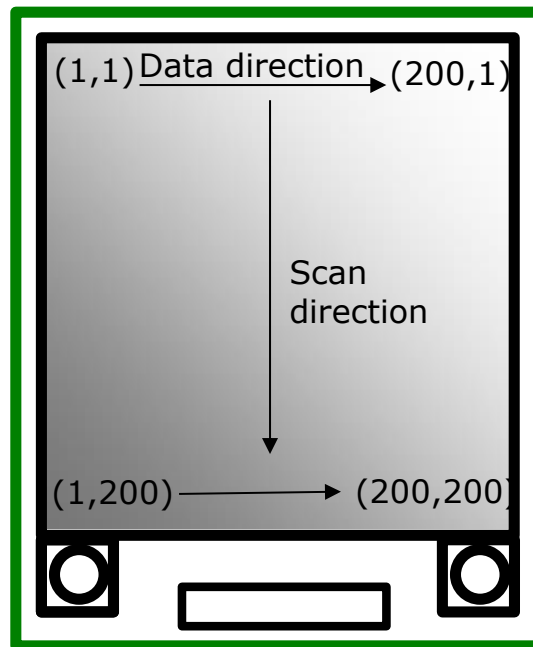

Pin 1


## 1.4 EPD Driving Flow Chart

The flowchart below provides an overview of the necessary actions to update the EPD. The steps below refer to the detailed descriptions in the respective sections.

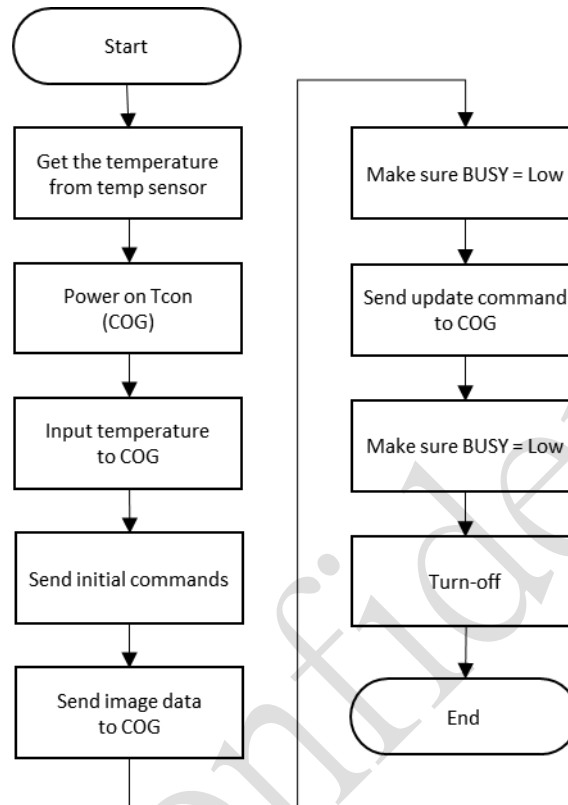

## 1.5 Overall Waveform

The diagram below provides a signal control overview during an EPD update cycle.

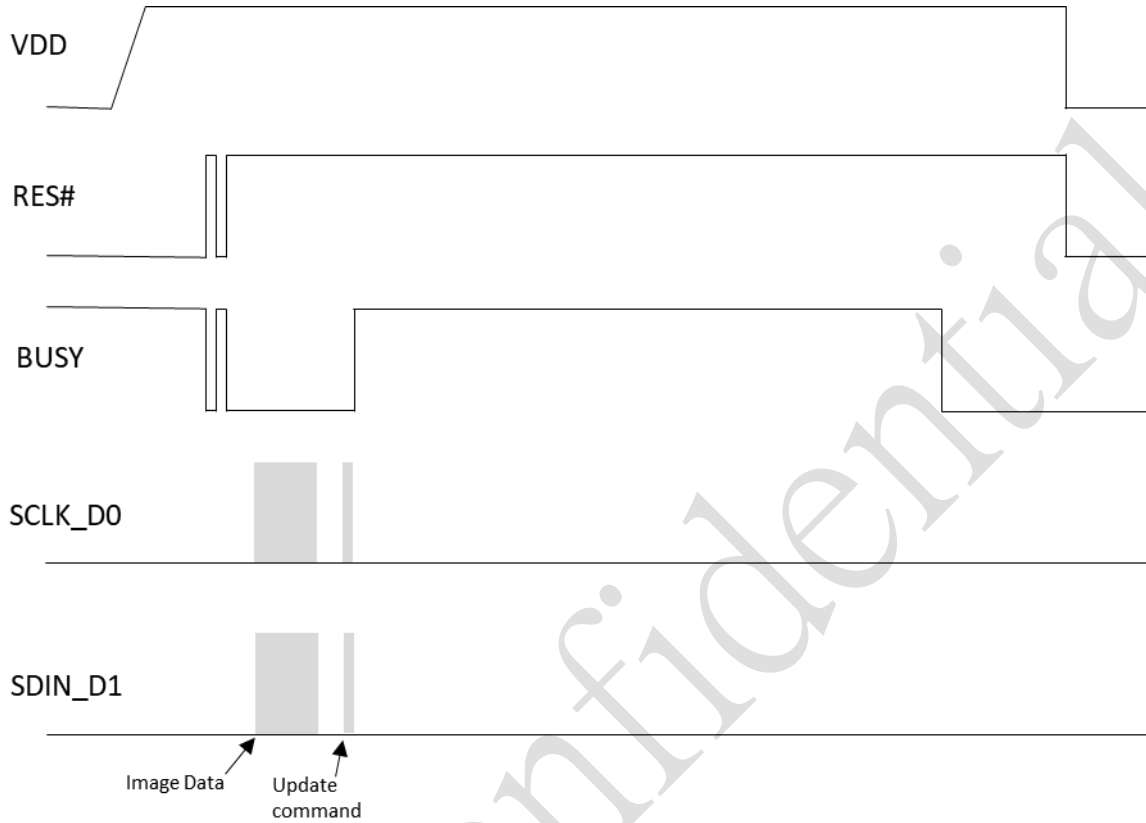

## 1.6 SPI Timing Format

SPI commands are used to communicate between the MCU and the COG Driver. The SPI format used differs from the standard in that two-way communications are not used. When setting up the SPI timing, PDI recommends verify both the SPI command format and SPI command timing in this section.

- SPI pin description:
  - SCLK\_D0 : Serial communication clock.
  - SDIN\_D1 : Serial communication data input/output.
    - When send register index/data, the pin must be an output of MCU.
    - When read data, the pin must be an input of MCU.
  - D/C# : The pin is used to distinguish between register index and data.
    - L : Register index.                      H : Data.
  - CS# : Serial communication chip select.

- Below is a description of the SPI Format:


SPI(0xI, 0xD<sub>0</sub>, 0xD<sub>1</sub>, 0xD<sub>2</sub>, ...)

Where:



I is the Register Index and the length is 1 byte

D<sub>0~n</sub> is the Register Data. The Data length is variable by different Register Index.

- SPI command signals and flowchart:

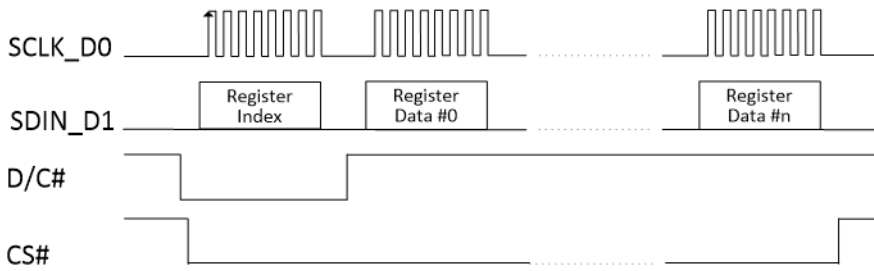


For example:  
 To send two SPI commands:  
 SPI((0x08,0x9D) and SPI(0x09, 0xD0)

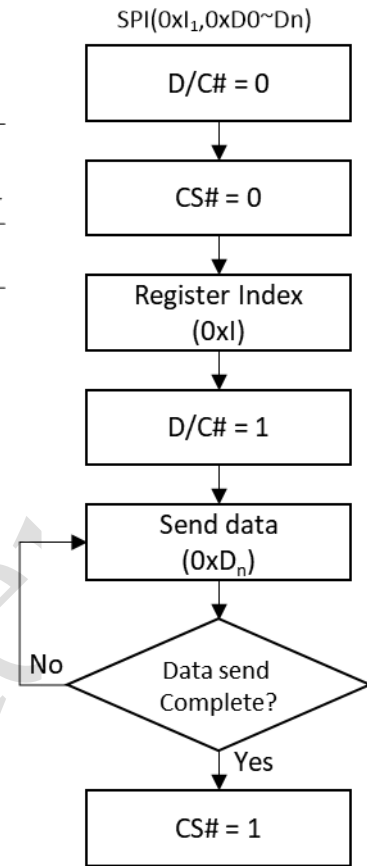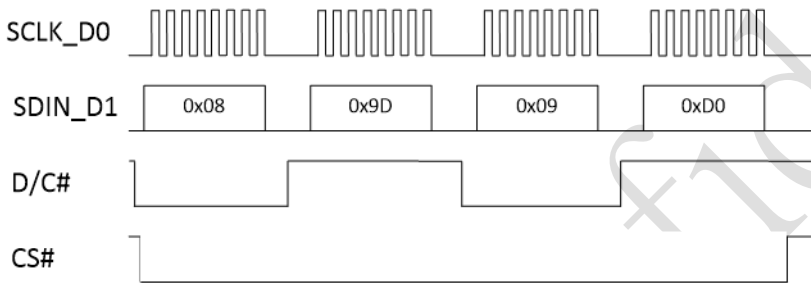





- SPI read command signals and flowchart:

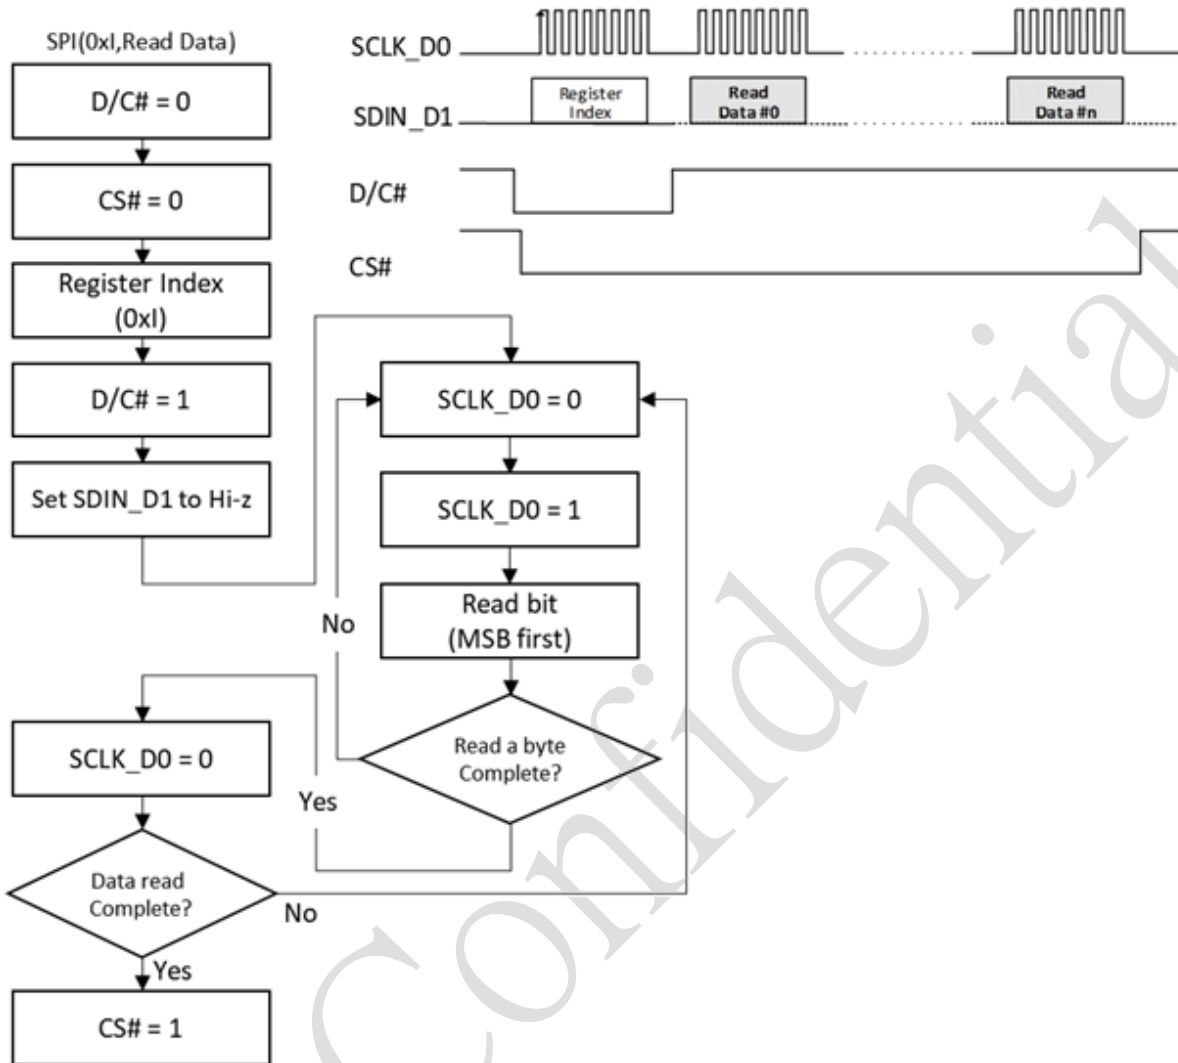

- SPI command timing

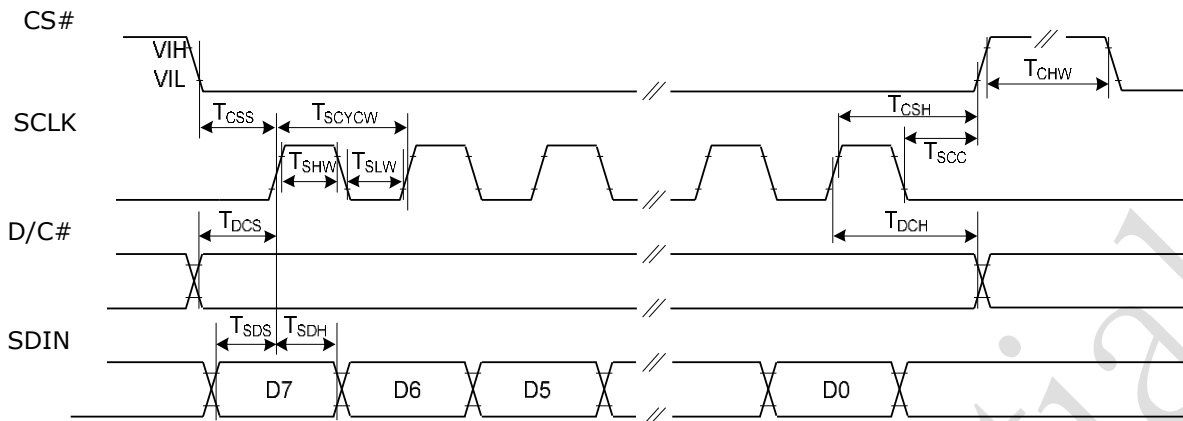

Write mode

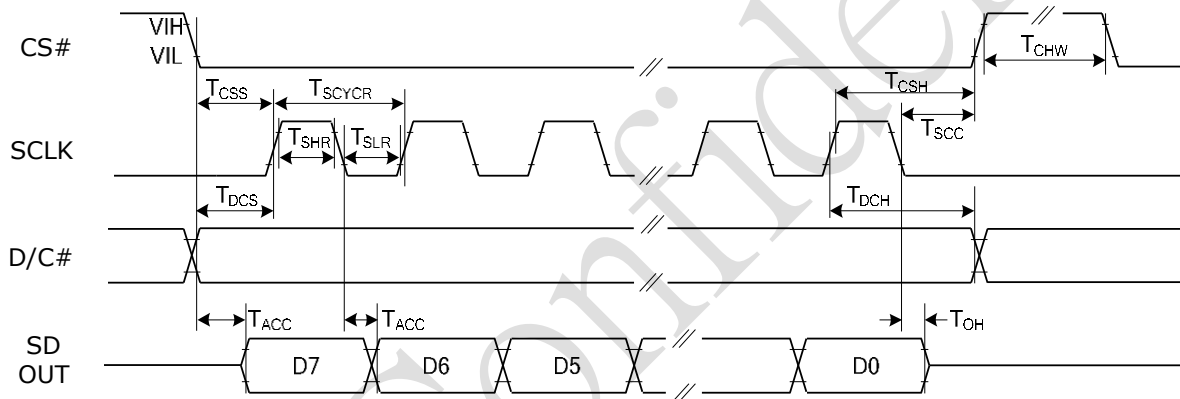


Read mode

### SPI AC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Chip Select Setup Time	$T_{CSS}$	60	-	-	ns	
Chip Select Hold Time	$T_{CSH}$	65	-	-	ns	
Chip Select Setup Time	$T_{SCC}$	25	-	-	ns	
Chip Select Setup Time	$T_{CHW}$	100	-	-	ns	
Serial Clock Cycle (Write)	$T_{SCYCW}$	50	-	-	ns	
SCLK "H" Pulse Width (Write)	$T_{SHW}$	25	-	-	ns	
SCLK "L" Pulse Width (Write)	$T_{SLW}$	25	-	-	ns	
Serial Clock Cycle (Read)	$T_{SCYCR}$	400	-	-	ns	
SCLK "H" Pulse Width (Read)	$T_{SHR}$	180	-	-	ns	
SCLK "L" Pulse Width (Read)	$T_{SLR}$	180	-	-	ns	
DC Setup Time	$T_{DCS}$	40	-	-	ns	
DC Hold Time	$T_{DCH}$	40	-	-	ns	
Data Setup Time	$T_{SDS}$	30	-	-	ns	
Data Hold Time	$T_{SDH}$	30	-	-	ns	
Access Time	$T_{ACC}$	-	-	100	ns	
Output Disable Time	$T_{OH}$	15	-	-	ns	


## 2. Power on COG driver

This flowchart describes power sequence for driver chip.

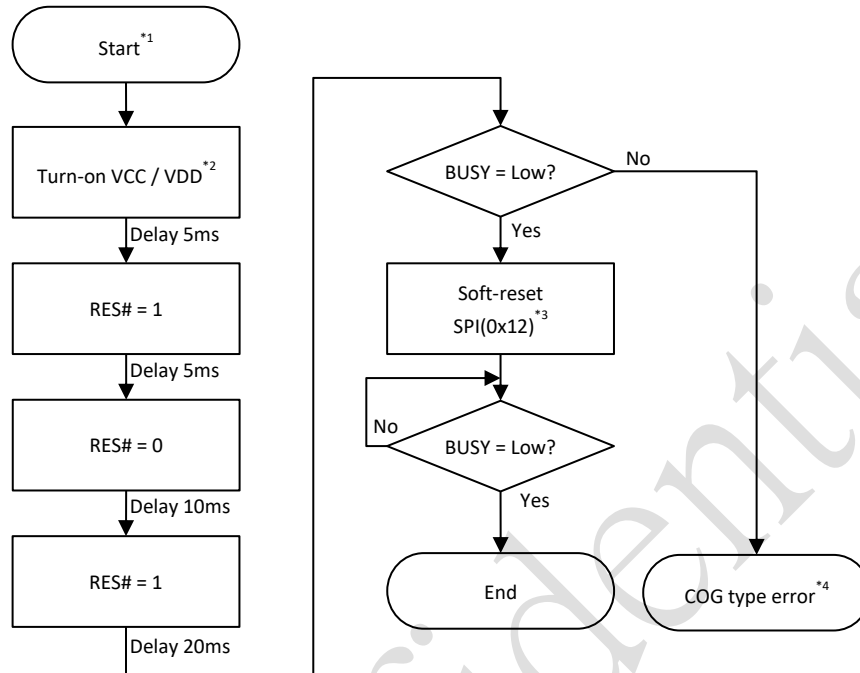

**Note:**


1. Start: initial state the VCC/VDD, RES#, CS#, SDIN, SCLK = 0
2. In order to the inrush current will case other issue. It is recommended to add soft-start when VCC/VDD is turned on. (as the circuit below)

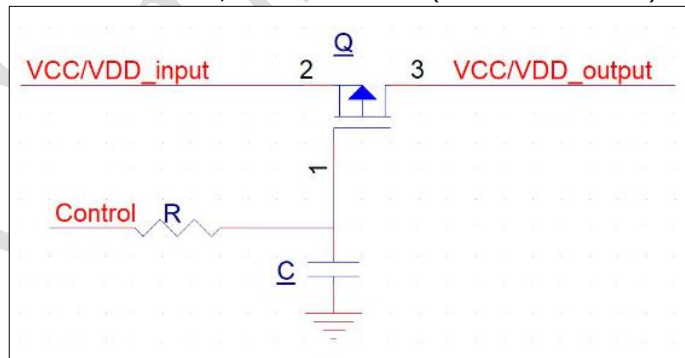

3. This register does not have data, just need send the index.
4. This document does not apply to the EPD.

### 3. Input initial command

Please send the initial command to EPD according to the flowchart.

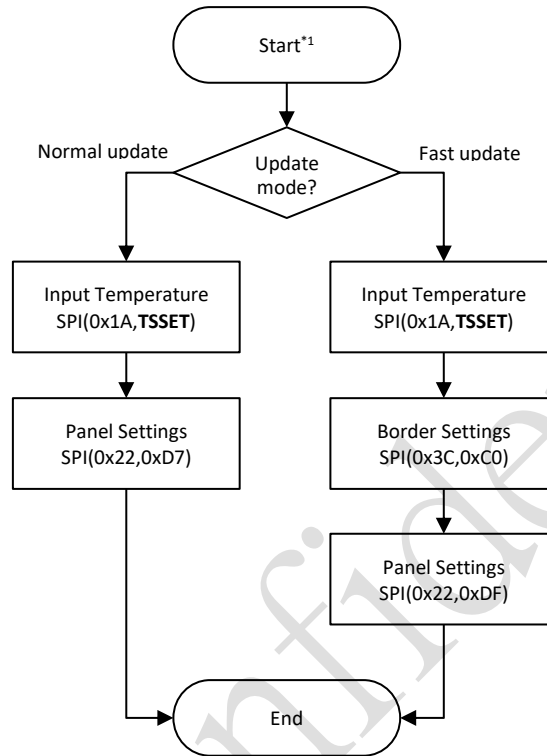

**Note:**

1. Start: Follow the end of the power on sequence.

**TSSET:** is the temperature value and unit are degree of Celsius. The highest bit of the data represents positive/negative in temperature.

- If it's positive, the data = (temperature value)
- If it's negative, the data = (2's complement of temperature value)

Example:

Temperature value	data
25°C	0x19
-5°C	0xFB
-15°C	0xF1

The operate temperature range for wide temperature EPD is different between Normal and Fast update.

Normal update : 60°C ~ -15°C


Fast update : 50°C ~ 0°C

**\*\*\* The TSSET cannot be set outside of this range. \*\*\***

**\*\*\* Otherwise, the EPD will be update abnormal. \*\*\***

## 4. Input image to the EPD

This section describes how to send the image data into the COG driver. EPD needs to receive two frames image data each update but the image data definitions of "Normal" update and "Fast" update are different. The two frames image data must be sent into EPD from register of **0x24** and **0x26** respectively.

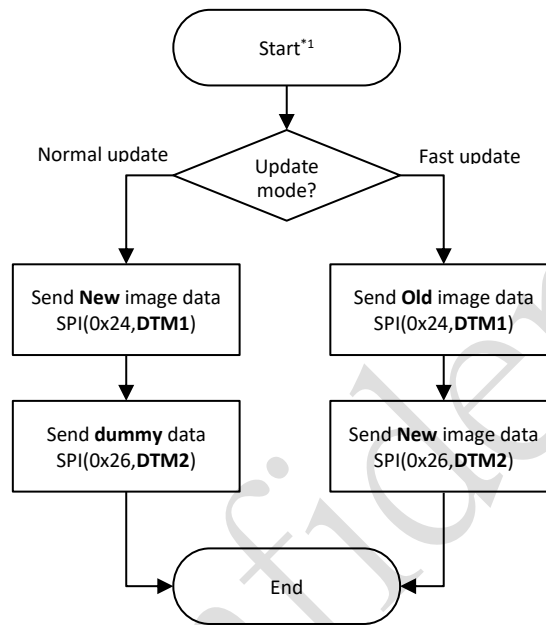

**Note:**

1. Start: Follow the end of the initial command.

## 5.1 DTM1, DTM2 Definition

DTM1 and DTM2 mean the image data of the first frame and the second frame, respectively. Their definitions are different between "Normal update" and "Fast update".

### DTM1:

For Normal update, it is the NEW image data that you want displaying next moment.

For Fast update, it is the OLD image data that already displayed on the EPD.

### DTM2:


For Normal update, it is dummy data. It just needs to be filled with the enough amount of 0x00.

For Fast update, it is the NEW image data that you want displaying next moment.

Data	Pixel Color
1	Black
0	White

## 5.2 Image data sending (DTM1, DTM2)

This section describes how to send the DTM1 and DTM2 data and how mapping to real pixel. User needs to send enough image data into COG through both register 0x24(DTM1) and 0x26(DTM2).

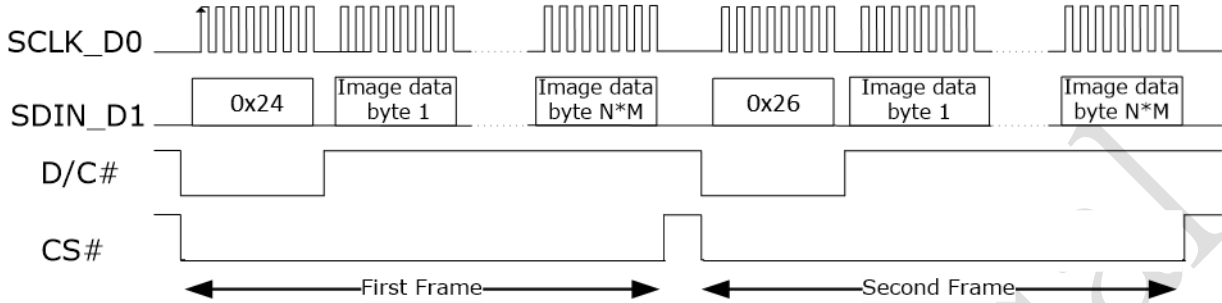

Note 1:  $n=(N*M)/8$

The data of image frame, one bit represents 1 pixel. (e.g. the first byte represents the 1st ~ 8th pixels of the first line, the second byte represents the 9th ~ 16th pixels of the first line, ..... and so on).

Data Byte	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]
Pixel	P[[n]	P[n+1]	P[n+2]	P[n+3]	P[n+4]	P[n+5]	P[n+6]	P[n+7]


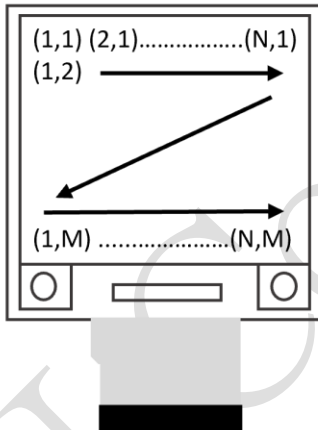


Image data input sequence :  
 Line1 : (1,1)>(2,1)>.....>(N,1)>  
 Line2 : (1,2)>(2,2)>.....>(N,2)>  
 :  
 :  
 Line M : .....>(N,M)

A Frame Total : 1 x N x M  
 = N x M bits  
 = (N x M) / 8 Bytes

EPD size	N	M	Total bytes/frame
1.52"	200	200	5,000

## 5. Send updating command

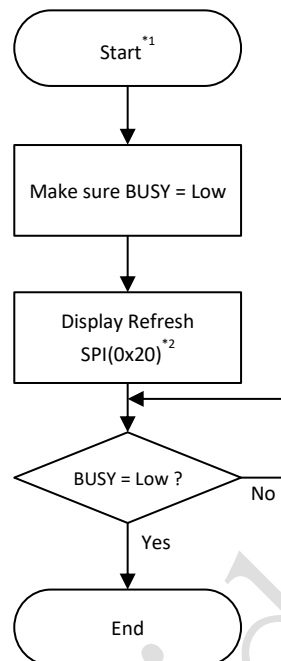


**Note:**

1. Start: Follow the end of the input image sequence
2. This register does not have data, just need send the index



## 6. Turn-off DC/DC

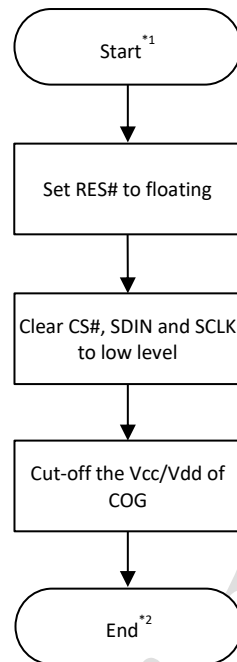

**Note:**

1. Start: Follow the end of the send updating command sequence
2. Finished the all of the steps for update the EPD

## Copyright

Pervasive Displays Incorporated All rights reserved.

This document is the exclusive property of Pervasive Displays Inc. (PDI) and shall not be reproduced or copied or transformed to any other format without prior permission of PDI. (PDI Confidential)

本資料為龍亭新技股份有限公司專有之財產，非經許可，不得複製、翻印或轉變成其他形式使用。

龍亭新技股份有限公司 Pervasive Displays Inc.

4F, No. 28, Chuangye Rd., Tainan Science Park, Tainan City 74144, Taiwan (R.O.C.)

Tel: +886-6-279-5399

<http://www.pervasivedisplays.com>

## Revision History

Version	Date	Page (New)	Section	Description
01	2023/12/25			First issue

PDI Confidential

## Glossary of Acronyms

EPD	Electrophoretic Display (e-Paper Display)
EPD Panel	EPD
TCon	Timing Controller
FPL	Front Plane Laminate (e-Paper Film)
SPI	Serial Peripheral Interface
COG	Chip on Glass
PDI, PDi	Pervasive Displays Incorporated

PDI Confidential